

Flexible Conduit



Flexible Conduit - Nylon (FCN) Polypropylene (FCP)

- For running cable protection in electrical, machinery and harness wiring
- Flexible body facilitates easy cornering or elbow applications
- Available in standard coils or contractor packs complete with adaptors

Nylon

Standard colour: Black

Advantages: Better resistance to chemical and physical attack. The conduit can be terminated quickly and easily leaving no jagged edges, which can injure operators' hands or damage cables.

Approvals: UL94-HB - Low smoke, zero halogen.

Temperature rating: -40°C to +120°C

Ingress protection (IP rating): IP67 when sealing ring fitted

Polypropylene


Standard colour: Black

Applications: Conduit suitable for embedding into floors and walls. Material has zero halogen content.

Approvals: None.

Temperature rating: -40°C to +120°C

Ingress protection (IP rating): IP55.

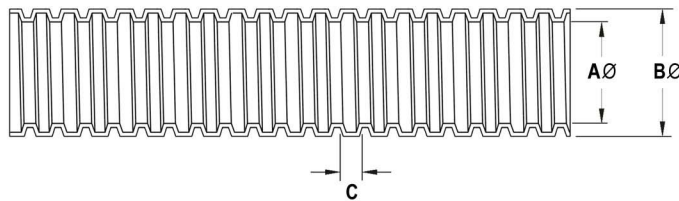

Standard Coils

Part No.		Dimensions mm			Reel qty (meters)	Adaptors	Pack qty
Nylon	Polyprop.	A Ø	B Ø	C			
FCN16	FCP16	10.7	16.0	3.30	100	FCA-16PN	50
FCN20	FCP20	14.1	20.0	3.70	100	FCA-20PN	50
FCN25	FCP25	19.3	25.0	4.10	100	FCA-25PN	50
FCN32	FCP32	24.3	32.0	3.61	50	FCA-32PN	50

Standard colour: Black. FCP20 and FCP25 also available in white.

Contractor Packs

Part No.		Dimensions mm			Pack Contents
Nylon	Polyprop.	A Ø	B Ø	C	
FCN20-PK10	FCP20-PK10	14.1	20.0	3.70	10m + 10 adaptors
FCN25-PK10	FCP25-PK10	18.3	25.0	4.10	10m + 10 adaptors

Standard colour: Black. Also available in white.